

SAFE-WAY®

Quality Garage Doors

Commercial

Polyurethane Insulated Model 717



* Shown with full vision window option.



Long Service Life & Savings

Choose the overhead door that works as hard as you do. Safe-Way Door's polyurethane insulated commercial doors are constructed with durable galvanized steel and heavy-duty hardware to ensure a long service life. Plus the environmentally safe polyurethane foam and sealed thermal break provide excellent insulating value that enables you to save on heating and cooling costs.

Opening Doors to Opportunity.




Commercial

Polyurethane Insulated Model 717

Windows - available insulated or uninsulated



8" x 24"

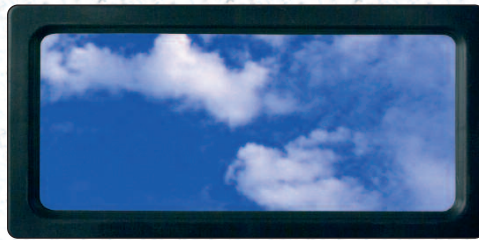

12" x 24"



16" x 34"

Standard Features

- Standard sizes: up to 28' 2" wide
- Hot-dipped galvanized 26 ga. exterior and 26 ga. interior
- End stiles 20 ga. galvanized
- Double end hinges over 14' 2" wide

Product Features

- Doors are finished with G-60 hot dipped galvanized steel skins, a baked on primer and a finish coat of polyester paint in either white or brown.
- Polyurethane foam insulation provides an exceptional R-Value and is environmentally safe and friendly.
- Chemically bonded and sealed thermal break - maximizes door insulating efficiency by preventing heat transfer.
- Continuous double steel reinforcement hinge strips allow for use of industry standard full size hinges.
- Hinges are 14 gauge and rollers are 10 ball bearing steel.
- Galvanized track is available in 2" or 3". Vertical lift, high lift, follow the roof slope and low headroom options are available. Consult your dealer for details.
- Doors are balanced by a torsion spring counterbalance system constructed of oil tempered torsion springs. High cycle spring options of 50,000 or 100,000 are available.

- Tongue & groove section joint
- Thermal break chemically sealed & bonded
- CFC free polyurethane foam
- Twin seal on bottom
- Heavy-duty hardware
- 2" thick insulation (R = 16.3; U = .06)

- Doors come standard with an inside slide lock. A keyed lock bar or snap latch locking systems are available.
- Insulated windows are available in rectangular plexiglass shapes of 8" x 24", 12" x 24", or 16" x 34". A full vision window option in double strength glass or plexiglass is also available.


Section Colors




White

Brown

Construction



- A. Finish Painted Coat
- B. Primer Coat
- C. Galvanized Layer
- D. Steel

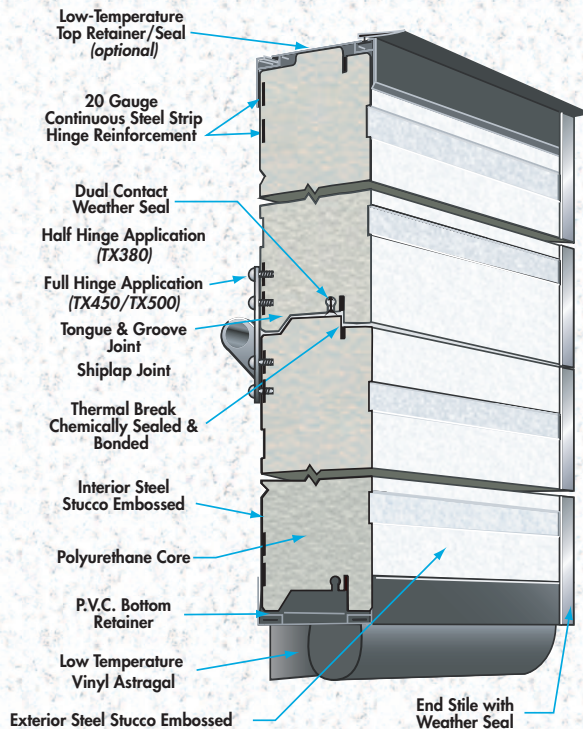

Distributed by:



As Safe-Way Door constantly strives to improve our product, all specifications listed in this informative brochure are subject to change without notice or obligation. Printed color may vary from actual color, please check with your local dealer for color swatches.
2006 E-20-008

SAFE-WAY®

Quality Garage Doors

3814 East U.S. 30 • Warsaw, IN 46580
574-267-4861 • Fax: 574-267-2871
safe-waydoor.com